












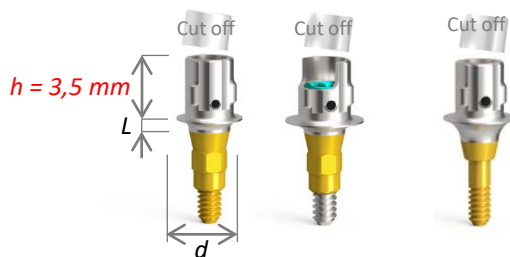




Connection type	QR/I		QR/I/AN	QR/NI		QR/NI/AN	QR/B		QR/B/AN
Application	Solo crown			Linear bridge			Bridge		



Specification		L0.7	L1.5	L2.5	Compatible burn-out coping	Compatible scanbodies
QR/I/d4.5/h5.5, indexed – wide		2218.07	2218.15	2218.25	B (d4.5)	2876.00, 2815.00, 2881.00
QR/I/d4.5/h8.0, indexed – wide		2225.07		2225.25	B (d4.5)	2876.00, 2815.00, 2881.00
QR/I/d4.5/h3.5, indexed – wide			2230.15		B (d4.5)	2876.00, 2815.00, 2881.00
QR/I/d3.8/h5.5, indexed – narrow		2216.07	2216.15		A (d3.8)	2876.00, 2815.00, 2881.00
QR/NI/d4.5/h5.5, non-indexed – wide		2220.07	2220.15		B (d4.5)	2876.00, 2815.00
QR/B/d4.5/h5.5/B, bridge – wide		2221.07	2221.15		B (d4.5)	2876.00, 2815.00
QR/B/d4.5/h3.5/B, bridge – wide			2234.15		B (d4.5)	2876.00, 2815.00
QR/I/AN/d4.5/h5.5, indexed – wide		2219.07	2219.15		–	2876.00, 2815.00, 2881.00
QR/NI/AN/d4.5/h5.5, non-indexed – wide		2227.07	2227.15		–	2876.00, 2815.00
QR/B/AN/d4.5/h5.5, bridge – wide		2226.07	2226.15		–	2876.00, 2815.00






Connection type

QN/I  QN/I/AN  QN/NI

Application

Solo crown      Linear bridge



Specification		L0.7	L1.5	L2.5	Compatible burn-out coping	Compatible scanbodies
QN/I/d3.8/h5.5, indexed – narrow		2208.07	2208.15		A (d3.8)	2882.00, 2877.00, 2840.00
QN/NI/d4.5/h5.5, indexed – wide			2213.15		–	2877.00, 2840.00
QN/I/AN/d4.5/h5.5, indexed – wide		2211.07	2211.15		–	2882.00, 2877.00, 2840.00