




Connection type	QR/I	QR/NI	QR/B
Application	Solo crown	Linear bridge	Bridge



Specification	L0.7	L1.5	L2.5	Compatible burn-out coping	Compatible scanbodies
QR/I/d4.5/h5.5, indexed – wide		2218.07	2218.15	2218.25	B (d4.5) 2881.00, 2876.00, 2815.00
QR/I/d4.5/h8.0, indexed – wide		2225.07		2225.25	B (d4.5) 2881.00, 2876.00, 2815.00
QR/I/d4.5/h3.5, indexed – wide			2230.15		B (d4.5) 2881.00, 2876.00, 2815.00
QR/I/d3.8/h5.5, indexed – narrow		2216.07	2216.15		A (d3.8) 2881.00, 2876.00, 2815.00
QR/NI/d4.5/h5.5, non-indexed – wide		2220.07	2220.15		B (d4.5) 2876.00, 2815.00
QR/B/d4.5/h5.5/B, bridge – wide		2221.07	2221.15		B (d4.5) 2876.00, 2815.00
QR/B/d4.5/h3.5/B, bridge – wide			2234.15		B (d4.5) 2876.00, 2815.00



Connection type

QR/I/AN

QR/NI/AN

QR/B/AN

Application

Solo crown

Linear bridge


Bridge

Ref. No. 2858.00



S3.5
S4.0
T4.0
S5.0
T5.0

Specification		L0.7	L1.5	Compatible scanbodies
QR/I/AN/d4.5/h5.5, indexed – wide		2219.07	2219.15	2881.00, 2876.00, 2815.00
QR/NI/AN/d4.5/h5.5, non-indexed – wide		2227.07	2227.15	2876.00, 2815.00
QR/B/AN/d4.5/h5.5, bridge – wide		2226.07	2226.15	2876.00, 2815.00

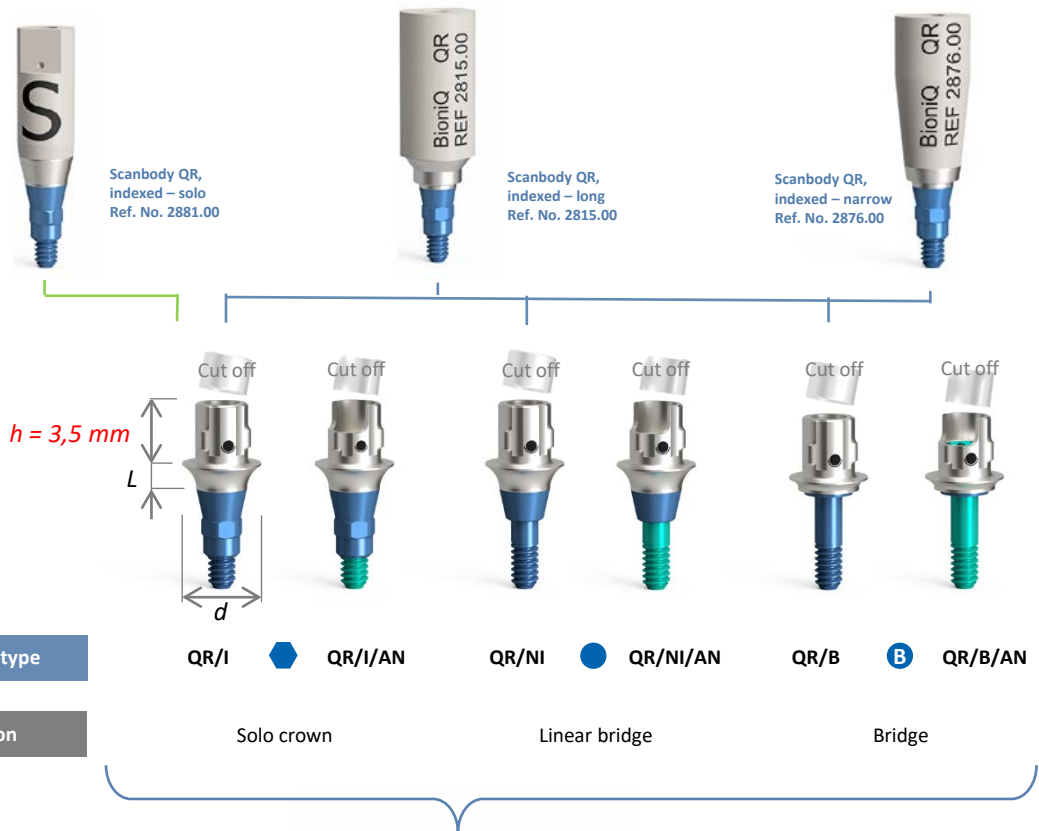

Specification		L0.7	L1.5	L2.5	Compatible burn-out coping	Compatible scanbodies
QR/I/d4.5/h5.5, indexed – wide	⬡	2218.07	2218.15	2218.25	B (d4.5)	2881.00, 2876.00, 2815.00
QR/I/d4.5/h8.0, indexed – wide	⬡	2225.07		2225.25	B (d4.5)	2881.00, 2876.00, 2815.00
QR/I/d4.5/h3.5, indexed – wide	⬡		2230.15		B (d4.5)	2881.00, 2876.00, 2815.00
QR/I/d3.8/h5.5, indexed – narrow	⬡	2216.07	2216.15		A (d3.8)	2881.00, 2876.00, 2815.00
QR/NI/d4.5/h5.5, non-indexed – wide	●	2220.07	2220.15		B (d4.5)	2876.00, 2815.00
QR/B/d4.5/h5.5/B, bridge – wide	Ⓚ	2221.07	2221.15		B (d4.5)	2876.00, 2815.00
QR/B/d4.5/h3.5/B, bridge – wide	Ⓚ		2234.15		B (d4.5)	2876.00, 2815.00
QR/I/AN/d4.5/h5.5, indexed – wide	⬡	2219.07	2219.15		–	2881.00, 2876.00, 2815.00
QR/NI/AN/d4.5/h5.5, non-indexed – wide	●	2227.07	2227.15		–	2876.00, 2815.00
QR/B/AN/d4.5/h5.5, bridge – wide	Ⓚ	2226.07	2226.15		–	2876.00, 2815.00




Scanbody QN,
indexed – solo
Ref. No. 2882.00



Scanbody QN,
indexed – long
Ref. No. 2840.00



Scanbody QN,
indexed – narrow
Ref. No. 2877.00



Connection type

QN/I



QN/NI



Application

Solo crown

Linear bridge

Ref. No. 2859.00



S2.9

Specification		L0.7	L1.5	L2.5	Compatible burn-out coping	Compatible scanbodies
QN/I/d3.8/h5.5, indexed – narrow		2208.07	2208.15		A (d3.8)	2882.00, 2877.00, 2840.00
QN/NI/d4.5/h5.5, non-indexed – wide			2213.15		B (d4.5)	2877.00, 2840.00




Scanbody QN,
indexed – solo
Ref. No. 2882.00



Scanbody QN,
indexed – long
Ref. No. 2840.00



Scanbody QN,
indexed – narrow
Ref. No. 2877.00



QN/I/AN

Solo crown

Connection type

Application

Ref. No. 2859.00



S2.9

Specification

QN/I/AN/d4.5/h5.5, indexed – wide




L0.7

2211.07

L1.5

2211.15

L2.5

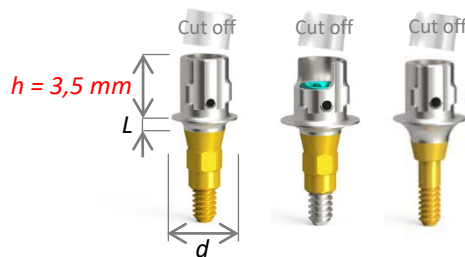

Connection type

QNI QN/I/AN QN/NI

Application

Solo crown

Linear bridge



Specification		L0.7	L1.5	L2.5	Compatible burn-out coping
QNI/d3.8/h5.5, indexed – narrow		2208.07	2208.15		A (d3.8)
QN/NI/d4.5/h5.5, indexed – wide			2213.15		–
QNI/I/AN/d4.5/h5.5, indexed – wide		2211.07	2211.15		–